



Hush Panels

acoustic and decorative panelling

G79.8

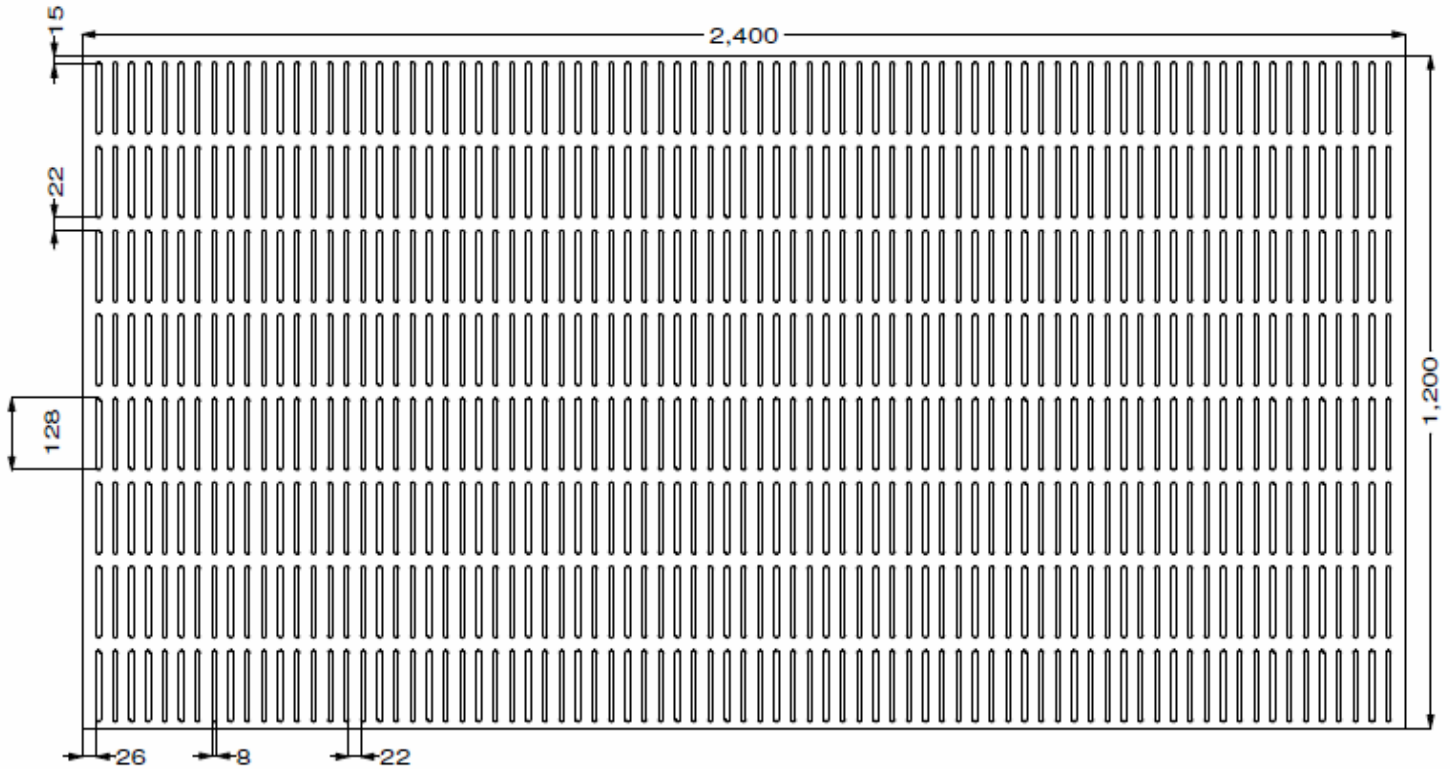

Sound absorption prediction carried out by [Marshall Day Acoustics](#).
Based on 12mm thick panel with [Autex AAB 35-50](#) acoustic backing.
Margin of error less than +/- 0.05.

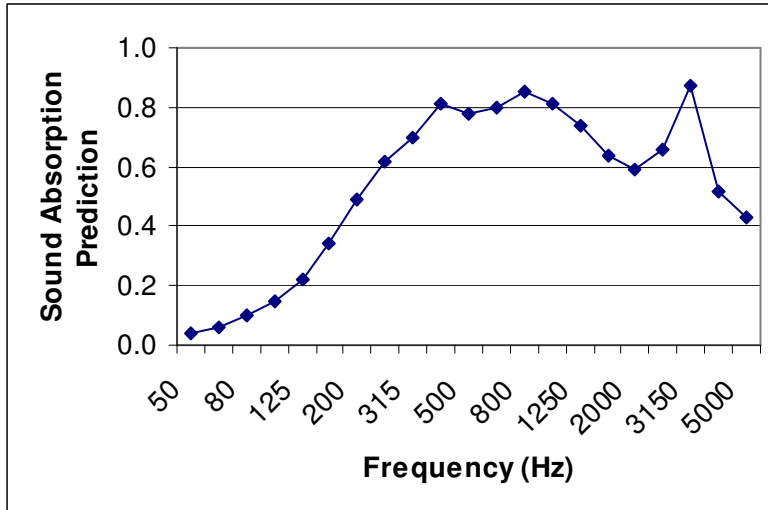

Frequency (Hz)	alpha random
50	0.04
63	0.06
80	0.10
100	0.15
125	0.22
160	0.34
200	0.49
250	0.62
315	0.70
400	0.81
500	0.78
630	0.80
800	0.85
1000	0.81
1250	0.74
1600	0.64
2000	0.59
2500	0.66
3150	0.87
4000	0.52
5000	0.43

Open Area: 31.00%

NRC 0.70

Cooper Webley Ltd 2006
residential and commercial joinery

www.hushpanels.co.nz

Ph 03 547 0010 / Fax 03 547 0016 / Email joinery@cooperwebley.co.nz
Showroom: 64 Beatty Street, Tahunanui, Nelson